



smarTROLL™ RDO® Handheld

HOLD THE FUTURE OF DISSOLVED OXYGEN MONITORING IN YOUR HAND. THE SMARTROLL RUGGED DISSOLVED OXYGEN (RDO) HANDHELD COMBINES THE INDUSTRY-LEADING OPTICAL DO SENSOR WITH REVOLUTIONARY SMARTPHONE MOBILITY. THE INTUITIVE VUSITU™ MOBILE APP ELIMINATES TRAINING TIME AND RUNS ON YOUR ANDROID™ OR IOS™ DEVICE.

The smarTROLL RDO Handheld simultaneously measures four parameters:

- Dissolved oxygen with EPA-approved RDO methods
- Barometric pressure
- Air temperature
- Water temperature

Simply connect the smarTROLL RDO Probe to a battery pack/power pack, launch the mobile app and start reading results. No warm-up time or tedious setup. The Mobile App guides you through spot checks, calibrations, and data management.

BE MOBILE

- **Use the smarTROLL RDO anywhere:** Reduce field equipment requirements for routine monitoring.
- **Instantly collaborate with colleagues:** Use a wired or wireless connection to send real-time snapshots of data.

www.in-situ.com

CALL OR CLICK TO PURCHASE OR RENT
1-800-446-7488 (toll-free in U.S.A. and Canada)
1-970-498-1500 (U.S.A. and international)

- **Streamline data management:** Consolidate all site information on your smartphone and tag data with site photos and GPS coordinates. Log data to your smartphone and download results in a Universal Data File.
- **Record critical data with ease:** Capture GPS and location metadata alongside every reading.

BE SMART

- **Eliminate errors:** The smarTROLL RDO automatically recognizes calibration solutions, stores calibration data in the sensor, and performs diagnostics. Start monitoring immediately—the RDO Smart Sensor Cap carries its own factory calibration and is ready to go.
- **Reduce maintenance:** With RDO Abrasion Resistance technology, sensors stand up to the rigors of field use and calibrations are long lasting.


TOTAL FIELD SUPPORT

- Receive **free** application guidance, 24/7 technical support, and mobile help in the field.
- Order supplies from the In-Situ website with your smartphone.
- Get guaranteed 7-day service for maintenance (U.S.A. only).

Applications:

- **AMBIENT WATER QUALITY SPOT CHECKS IN FRESHWATER AND SALTWATER**
- **AQUACULTURE**
- **DAM WATER SAMPLING**
- **EFFLUENT MONITORING**
- **STORMWATER MANAGEMENT**

GENERAL smarTROLL RUGGED DISSOLVED OXYGEN (RDO) HANDHELD INSTRUMENT						
OPERATING TEMP.	-5 to 50° C (23 to 122° F)					
STORAGE TEMP.	-40 to 65° C (-40 to 149° F)					
DIMENSIONS & WEIGHT	Dimensions: 2.8 cm (1.1 in.) OD x 16.8 cm (6.6 in.) with restrictor (does not include connector). Weight: 255 g (0.56 lbs).					
WETTED MATERIALS	316 stainless steel, titanium, Acetal, Viton®, PC/PMMA					
ENVIRONMENTAL RATING	Probe: IP68 with all sensors and cable attached. IP67 with sensors removed and cable detached. Battery pack: IP67 with battery cover closed.					
READING RATE	1 reading every 10 seconds; data logged to smartphone.					
POWER	6 VDC from battery pack					
SOFTWARE	Android™: VuSitu through Google Play™ or Amazon® App Store; iOS: VuSitu through Apple® App Store; Windows®: Win-Situ 5, Data Services: HydroVu					
INTERFACE	Android 4.4, requires Bluetooth 2.0; Win-Situ 5 Software					
CABLE	Black polyurethane. Standard lengths available: 1.5 m, 4.6 m, 9.1 m (5 ft, 15 ft, 30 ft)					
STANDARD SENSORS	ACCURACY	RANGE	RESOLUTION	UNITS OF MEASURE	RESPONSE TIME	METHOD
DISSOLVED OXYGEN RDO® FAST CAP (OPTICAL SENSOR) smarTROLL RDO can use Classic, Fast or RDO-X Cap. Ships with Fast Cap.	±0.1 mg/L ±2% of reading	0 to 20 mg/L 20 to 60 mg/L Full operating range: 0 to 60 mg/L	0.01 mg/L	mg/L, % saturation, ppm	T90: <30 sec. T95: <45 sec.	EPA-approved In-Situ Methods 1002-8-2009 1003-8-2009 1004-8-2009
TEMP., SAMPLE* (PROBE)	±0.1° C	-5 to 50° C (23 to 122° F)	0.01° C or better	Celsius, Fahrenheit	T90: <120 sec.	EPA 170.1
BAROMETRIC PRESSURE (BATTERY PACK)	±3 mbar max.	300 to 1100 mbar	0.01 mbar	psi, kPa, bar, mbar, mmHg, inHg, Torr, atm	Instantaneous in thermal equilibrium	Piezoresistive pressure sensor
TEMP., AIR (BATTERY PACK)	±2° C	-20 to 70° C (-4 to 158° F)	0.1° C	Celsius, Fahrenheit	<30 sec.	EPA 170.1
WARRANTY	2-year warranty on probe. 1-year warranty on battery pack. 1-year warranty on cable.					
NOTES	Specifications are subject to change without notice. Apple, iPhone, iPod touch, and iPad are trademarks of Apple Inc. registered in U.S. and other countries. Viton is a registered trademark of DuPont Performance Elastomers L.L.C. * T63<30s, T90<120s, T95<210s Typical when exposed to 40°C temperature change. Response times will vary based on magnitude of temperature change.					

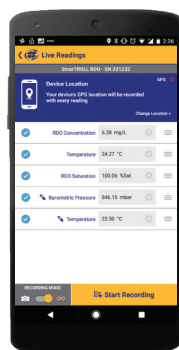

www.in-situ.com

CALL OR CLICK TO PURCHASE OR RENT
1-800-446-7488 (toll-free in U.S.A. and Canada) • 1-970-498-1500 (U.S.A. and international)

221 East Lincoln Avenue, Fort Collins, CO 80524 USA
Copyright © 2018 In-Situ Inc. All rights reserved. September 2018

